


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

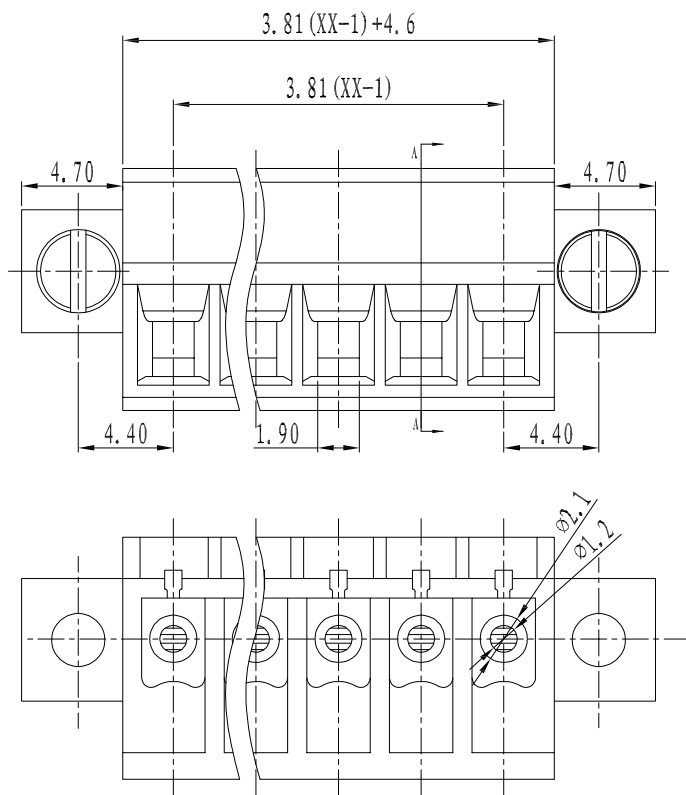

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/8A	300V/8A	300V/8A
IEC	过压类别(Overvoltage Category)	III/3	III/2	III/2
	/污染等级(Pollution Degree)	III/3	III/2	III/2
IEC	额定电器参数 (Rated Electrical Parameters)	300V/8A	300V/8A	300V/8A
	压线范围(Wire Range)	/		
IEC	工频耐压(Frequency Voltage)	AC 1300V		
	冲击耐压(Rated Surge Voltage)	4000V		
IEC	绝缘阻抗(Insulation Resistance)	DC500V 500MΩ above		
	接触电阻(Contact Resistance)	≤20mΩ		
IEC	剥线长度(String Length)	/		
	工作温度(Temperature)	-40° C--+105° C		
IEC	额定扭矩(Rated torque)	/		
	材质和电镀(Material and plating)	/		
IEC	绝缘材质(Housing)	PA66		
	导体材料(Contact)	铜合金, 镀锡(Copper alloy, Sn plsted)		
IEC	/	/		
	/	/		

产品命名编码:
(Product Number Code):

FPC1.5-XX-381-00M-YY

系列(Series) 型号(Model)
极数(NO. of poles) 塑体颜色(Housing Color)

端子间距(Pitch)

- 1:绿色(Green) 7:透明色(Transparent)
- 2:蓝色(Blue) 8:白色(White)
- 3:黑色(Black) 9:黄色(Yellow)
- 4:灰色(Grey) Y:多种颜色(Mixed color)
- 5:橙色(Orange)
- 6:红色(Red)

P=3.81mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p									
N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	17.81	21.62	25.43	29.24	33.05	36.86	40.67	44.48	48.29
B	3.81	7.62	11.43	15.24	19.05	22.86	26.67	30.48	34.29
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	52.10	55.91	59.72	63.53	67.34	71.15	74.96	78.77	82.58
B	38.10	41.91	45.72	49.53	53.34	57.15	60.96	64.77	68.58

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.			公差范围(Tolerance Range)	
型号(Type): FPC1.5-XX-381-00M-YY			150~	±1.50
			60~150	±1.00
核准(Approval): 图号(Drawing NO.):			30~60	±0.60
			6~30	±0.40
核审(Audit): 单位(Units):mm 页码(Page):1/1			0~6	±0.25
			角度(Angle) X	±2°
设计(Design): 比例(Scale):FULL			X.X	±1°
			版次(Version):T0	