


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

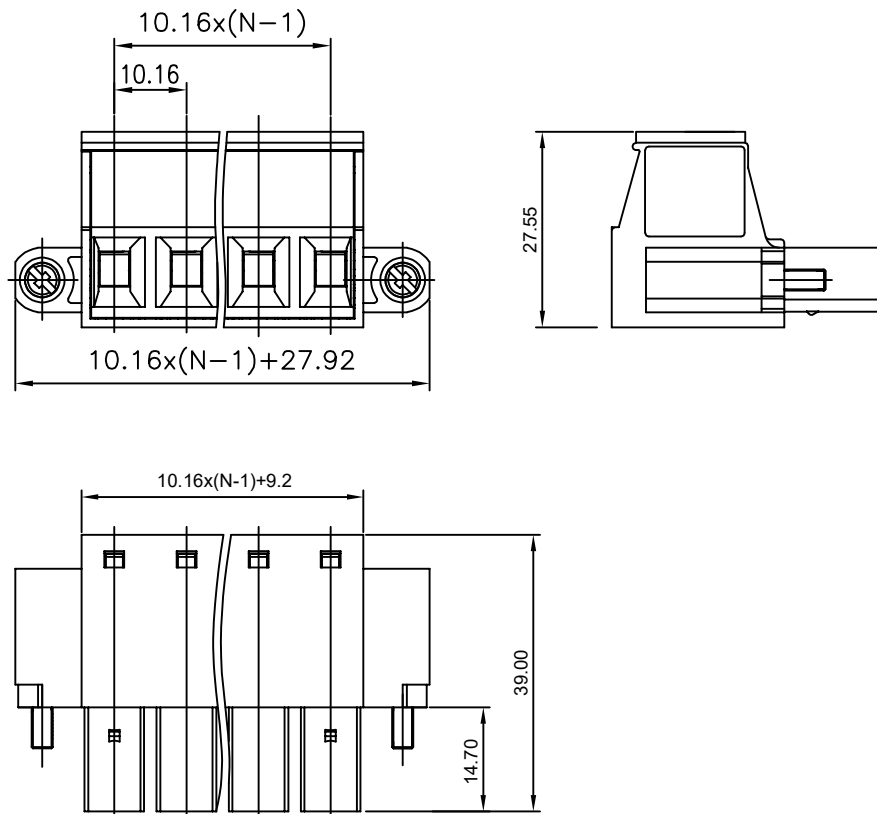

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	600V/55A	600V/55A	600V/55A
IEC	过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	600V/55A	600V/55A	600V/55A
压线范围(Wire Range)		/		
工频耐压(Frequency Voltage)		AC 2500V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		/		
工作温度(Temperature)		-40° C--+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plsted)		
/		/		

产品命名编码:
(Product Number Code):

FPC4-XX-1016-00M-YY

系列(Series) — 型号(Model)
极数(NO. of poles) — 塑体颜色(Housing Color)

端子间距(Pitch) —

1:绿色(Green) 7:透明色
2:蓝色(Blue) (Transparent)
3:黑色(Black) 8:白色(White)
4:灰色(Grey) 9:黄色(Yellow)
5:橙色(Orange) Y:多种颜色
6:红色(Red) (Mixed color)

P=10.16mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	38.08	48.24	58.40	68.56	78.72	88.88	99.04	109.2	119.36
B	10.16	20.32	30.48	40.64	50.80	60.96	71.12	81.28	91.44
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	129.52	139.68	149.84	160.00	170.16	180.32	190.48	200.64	210.80
B	101.60	111.76	121.92	132.08	142.24	152.40	162.56	172.72	182.88

 东莞市奥斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.		公差范围(Tolerance Range)	
		150~	±1.50
型号(Type): FPC4-XX-1016-00M-YY		60~150	±1.00
核准(Approval):		图号(Drawing NO.):	30~60 ±0.60
核审(Audit):		单位(Units):mm	6~30 ±0.40
设计(Design)		页码(Page):1/1	0~6 ±0.25
比例(Scale):FULL		角度(Angle): X	±2°
		(Angle): X.X	±1°
		版次(Version):T0	