

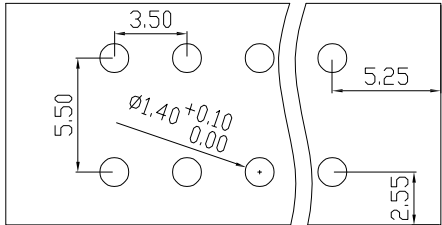
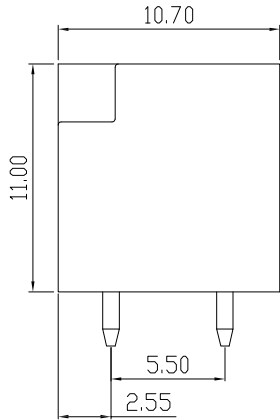


| 版次<br>(Version) | 变更内容<br>(Rev. Content) | 变更者<br>(Change Person) |
|-----------------|------------------------|------------------------|
|                 |                        |                        |
|                 |                        |                        |

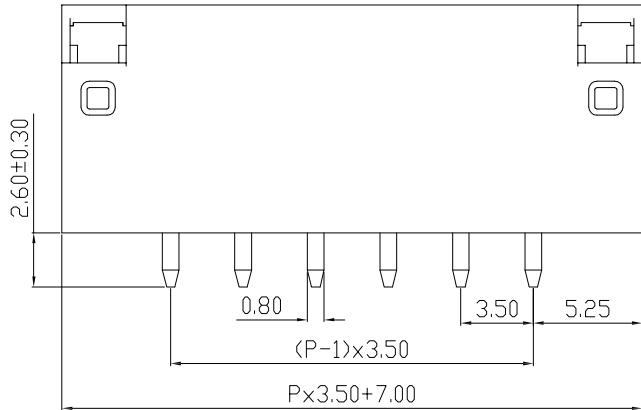

PCB LAYOUT

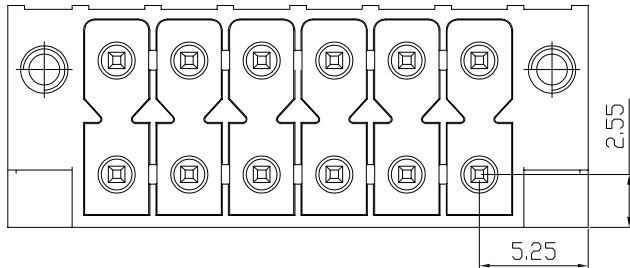

| 技术参数 (Technical Data)       |                                                       |                                  |         |         |
|-----------------------------|-------------------------------------------------------|----------------------------------|---------|---------|
| UL                          | 应用组别(Use group)                                       | B                                | C       | D       |
|                             | 额定电器参数<br>(Rated Electrical Parameters)               | 300V/8A                          | 300V/8A | 300V/8A |
| IEC                         | 过压类别(Overvoltage Category)<br>/污染等级(Pollution Degree) | III/3                            | III/2   | III/2   |
|                             | 额定电器参数<br>(Rated Electrical Parameters)               | 300V/8A                          | 300V/8A | 300V/8A |
| 压线范围(Wire Range)            |                                                       | /                                |         |         |
| 工频耐压(Frequency Voltage)     |                                                       | AC 1300V                         |         |         |
| 冲击耐压(Rated Surge Voltage)   |                                                       | 4000V                            |         |         |
| 绝缘阻抗(Insulation Resistance) |                                                       | DC500V 500MΩ above               |         |         |
| 接触电阻(Contact Resistance)    |                                                       | ≤20mΩ                            |         |         |
| 剥线长度(String Length)         |                                                       | /                                |         |         |
| 工作温度(Temperature)           |                                                       | -40° C--+105° C                  |         |         |
| 额定扭矩(Rated torque)          |                                                       | /                                |         |         |
| 材质和电镀(Material and plating) |                                                       |                                  |         |         |
| 绝缘材质(Housing)               |                                                       | PA66                             |         |         |
| 导体材料(Contact)               |                                                       | 铜合金, 镀锡(Copper alloy, Sn plsted) |         |         |
| /                           |                                                       | /                                |         |         |

产品命名编码:  
(Product Number Code):

FPH1.5-XX-350-26-YY

系列(Series)

型号(Model)

极数(NO. of poles)


塑体颜色(Housing Color)

端子间距(Pitch)

- |              |                         |
|--------------|-------------------------|
| 1:绿色(Green)  | 7:透明色<br>(Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)             |
| 3:黑色(Black)  | 9:黄色(Yellow)            |
| 4:灰色(Grey)   | Y:多种颜色<br>(Mixed color) |
| 5:橙色(Orange) |                         |
| 6:红色(Red)    |                         |

P=3.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

| N | 02P   | 03P   | 04P   | 05P   | 06P   | 07P   | 08P   | 09P   | 10P   |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L | 14.00 | 17.50 | 21.00 | 24.50 | 28.00 | 31.50 | 35.00 | 38.50 | 42.00 |
| B | 3.50  | 7.00  | 10.50 | 14.00 | 17.50 | 21.00 | 24.50 | 28.00 | 31.50 |
| N | 11P   | 12P   | 13P   | 14P   | 15P   | 16P   | 17P   | 18P   | 19P   |
| L | 45.50 | 49.00 | 52.50 | 56.00 | 59.50 | 63.00 | 66.50 | 70.00 | 73.50 |
| B | 35.00 | 38.50 | 42.00 | 45.50 | 49.00 | 52.50 | 56.00 | 59.50 | 63.00 |

|                                                                                                                                          |                                                                                                      |                  |
|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------------------|
|  东莞市澳斯电子有限公司<br>DONGGUAN AOSI ELECTRONICS CO., LTD, | 公差范围(Tolerance Range)                                                                                |                  |
|                                                                                                                                          | 150~                                                                                                 | ±1.50            |
| 型号(Type): FPH1.5-XX-350-26-YY                                                                                                            | 60~150                                                                                               | ±1.00            |
|                                                                                                                                          | 30~60                                                                                                | ±0.60            |
| 核准(Approval): 图号(Drawing NO.):                                                                                                           | 6~30                                                                                                 | ±0.40            |
|                                                                                                                                          | 0~6                                                                                                  | ±0.25            |
| 核审(Audit): 单位(Units):mm 页码(Page):1/1                                                                                                     | 角度<br>(Angle)                                                                                        | X ±2°<br>X.X ±1° |
|                                                                                                                                          | 设计(Design)                                                                                           | 比例(Scale):FULL   |
|                                                                                                                                          |  版次(Version):T0 |                  |