


| 版次 (Version) | 变更内容 (Rev. Content) | 变更者 (Change Person) |
|-----------------|------------------------|------------------------|
| | | |
| | | |

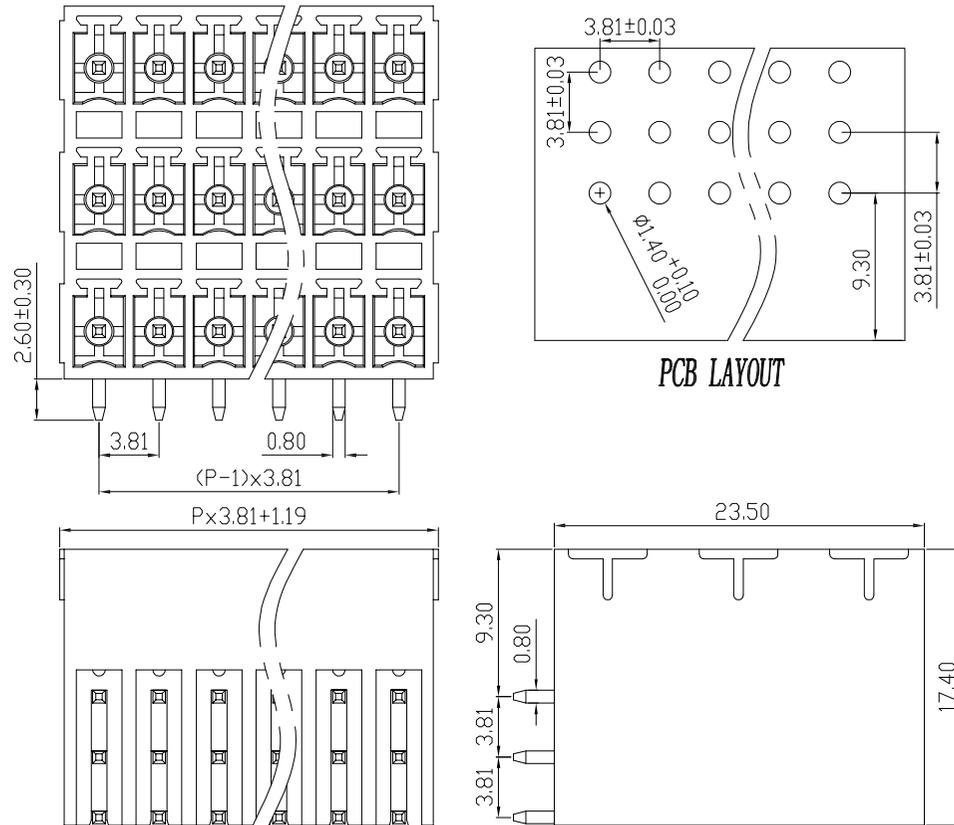

| 技术参数 (Technical Data) | | | | |
|-----------------------------|---|----------------------------------|---------|---------|
| UL | 应用组别(Use group) | B | C | D |
| | 额定电器参数 (Rated Electrical Parameters) | 300V/8A | 300V/8A | 300V/8A |
| IEC | 过压类别(Overvoltage Category) /污染等级(Pollution Degree) | III/3 | III/2 | III/2 |
| | 额定电器参数 (Rated Electrical Parameters) | 300V/8A | 300V/8A | 300V/8A |
| 压线范围(Wire Range) | | / | | |
| 工频耐压(Frequency Voltage) | | AC 2500V | | |
| 冲击耐压(Rated Surge Voltage) | | 4000V | | |
| 绝缘阻抗(Insulation Resistance) | | DC500V 500MΩ above | | |
| 接触电阻(Contact Resistance) | | ≤8mΩ | | |
| 剥线长度(String Length) | | / | | |
| 工作温度(Temperature) | | -40° C--+105° C | | |
| 额定扭矩(Rated torque) | | / | | |
| 材质和电镀(Material and plating) | | | | |
| 绝缘材质(Housing) | | PA66 | | |
| 导体材料(Contact) | | 铜合金, 镀锡(Copper alloy, Sn plsted) | | |
| / | | / | | |

产品命名编码:
(Product Number Code):

FPH1.5-XX-381-32R-YY

系列(Series) ———— 型号(Model)
极数(NO. of poles) ———— 塑体颜色(Housing Color)

端子间距(Pitch) ————

| | |
|--------------|-------------------------|
| 1:绿色(Green) | 7:透明色 (Transparent) |
| 2:蓝色(Blue) | 8:白色(White) |
| 3:黑色(Black) | 9:黄色(Yellow) |
| 4:灰色(Grey) | Y:多种颜色 (Mixed color) |
| 5:橙色(Orange) | |
| 6:红色(Red) | |

P=3.81mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

| N | 02P | 03P | 04P | 05P | 06P | 07P | 08P | 09P | 10P |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L | 8.81 | 12.62 | 16.43 | 20.24 | 24.05 | 27.86 | 31.67 | 35.48 | 39.29 |
| B | 3.81 | 7.62 | 11.43 | 15.24 | 19.05 | 22.86 | 26.67 | 30.48 | 34.29 |
| N | 11P | 12P | 13P | 14P | 15P | 16P | 17P | 18P | 19P |
| L | 43.10 | 46.91 | 50.72 | 54.53 | 58.34 | 62.15 | 65.96 | 69.77 | 73.58 |
| B | 38.1 | 41.91 | 45.72 | 49.53 | 53.34 | 57.15 | 60.96 | 64.77 | 68.58 |

| | | | |
|--|-----------------------|---|----------------|
|  东莞市奥斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD, | 公差范围(Tolerance Range) | | |
| | 150~ | ±1.50 | |
| 型号(Type): FPH1.5-XX-381-32R-YY | 60~150 | ±1.00 | |
| | 30~60 | ±0.60 | |
| 核准(Approval): | 6~30 | ±0.40 | |
| | 图号(Drawing NO.): | 0~6 | ±0.25 |
| 核审(Audit): | 角度(Angle) | X | ±2° |
| | 单位(Units):mm | X.X | ±1° |
| 设计(Design) | 页码(Page):1/1 | | |
| | 比例(Scale):FULL |  | 版次(Version):T0 |