


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

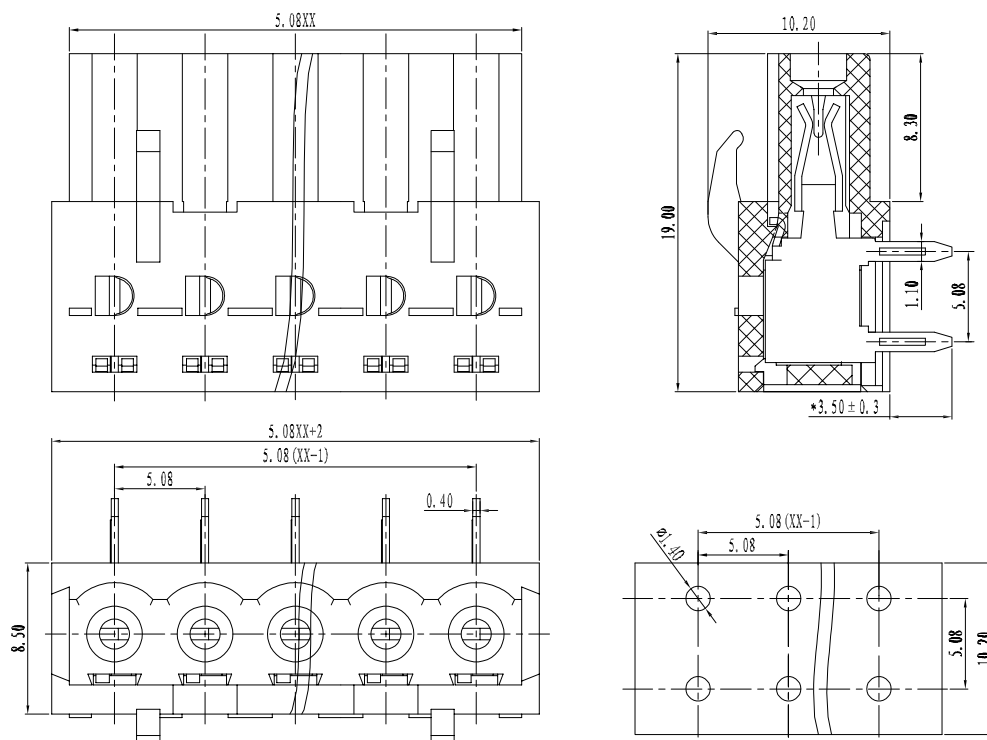

技术参数 (Technical Data)				
UL	应用组别 (Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A
IEC	过压类别 (Overvoltage Category) / 污染等级 (Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A
压线范围 (Wire Range)		/		
工频耐压 (Frequency Voltage)		AC 1600V		
冲击耐压 (Rated Surge Voltage)		4000V		
绝缘阻抗 (Insulation Resistance)		DC500V 500MΩ above		
接触电阻 (Contact Resistance)		≤20mΩ		
剥线长度 (String Length)		/		
工作温度 (Temperature)		-40° C--+105° C		
额定扭矩 (Rated torque)		/		
材质和电镀 (Material and plating)				
绝缘材质 (Housing)		PA66		
导体材料 (Contact)		铜合金, 镀锡 (Copper alloy, Sn plated)		
/		/		

产品命名编码:
(Product Number Code):

FPM2.5-XX-508-07R-YY

系列(Series) — 型号(Model)
极数(NO. of poles) — 塑体颜色(Housing Color)

端子间距(Pitch)

1:绿色(Green)	7:透明色 (Transparent)
2:蓝色(Blue)	8:白色(White)
3:黑色(Black)	9:黄色(Yellow)
4:灰色(Grey)	Y:多种颜色 (Mixed color)
5:橙色(Orange)	
6:红色(Red)	

P=5.08mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p									
N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	12.16	17.24	22.32	27.40	32.48	37.56	42.64	47.72	52.80
B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	57.88	62.96	68.04	73.12	78.20	83.28	88.36	93.44	98.52
B	50.80	55.88	60.96	66.04	71.12	76.20	81.28	86.36	91.44

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.		公差范围(Tolerance Range)	
		150~	±1.50
型号(Type): FPM2.5-XX-508-07R-YY		60~150	±1.00
核准(Approval):		30~60	±0.60
核审(Audit):		6~30	±0.40
设计(Design)		0~6	±0.25
比例(Scale): FULL		角度(Angle)	X ±2°
			X.X ±1°
		版次(Version): T0	