
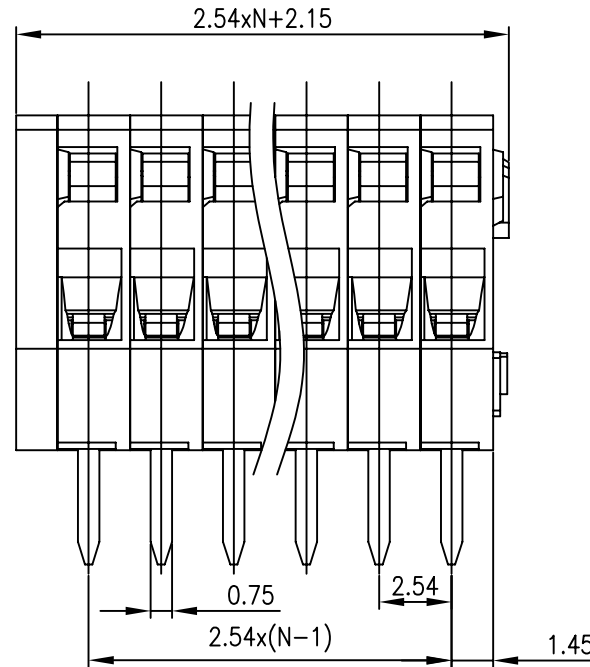


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

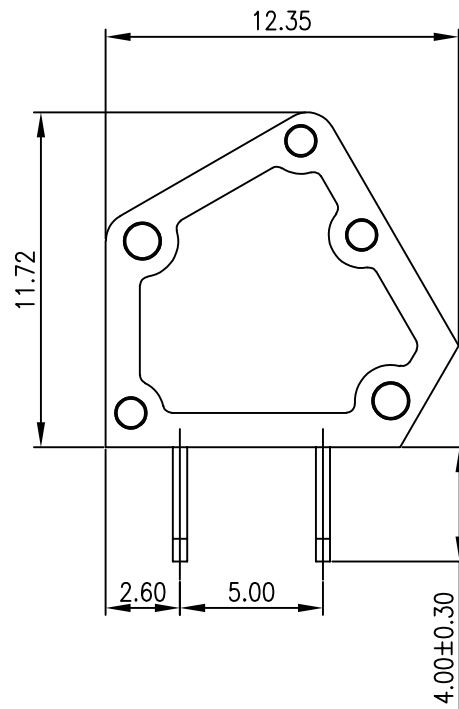

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
IEC	额定电器参数 (Rated Electrical Parameters)	150V/4A	150V/4A	150V/4A
	过压类别 (Overvoltage Category) /污染等级 (Pollution Degree)	III/3	III/2	III/2
	额定电器参数 (Rated Electrical Parameters)	150V/4A	150V/4A	150V/4A
	压线范围(Wire Range)	/		
工频耐压(Frequency Voltage)		AC 2500V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗 (Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		11		
工作温度(Temperature)		-40° C--+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plisted)		
/		/		

产品命名编码:
(Product Number Code):

FS1-XX-254-05W-YY

系列 (Series) — 型号 (Model)
极数 (NO. of poles) — 塑体颜色 (Housing Color)

端子间距 (Pitch)

1:绿色 (Green)	7:透明色 (Transparent)
2:蓝色 (Blue)	8:白色 (White)
3:黑色 (Black)	9:黄色 (Yellow)
4:灰色 (Grey)	Y:多种颜色 (Mixed color)
5:橙色 (Orange)	
6:红色 (Red)	

P=2.54mm,N为孔位数(N for hole digits),有效位数为 (Significant Digits):02p-19p

N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	7.23	9.77	12.31	14.85	17.39	19.93	22.47	25.01	27.55
B	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	30.09	32.63	35.17	37.71	40.25	42.79	45.33	47.87	50.41
B	25.40	27.94	30.48	33.02	35.56	38.10	40.64	43.18	45.72

东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD		公差范围 (Tolerance Range)	
型号 (Type): FS1-XX-254-05W-YY		150~	±1.50
		60~150	±1.00
核准 (Approval): 图号 (Drawing NO.):		30~60	±0.60
		6~30	±0.40
核审 (Audit): 单位 (Units):mm 页码 (Page):1/1		0~6	±0.25
		角度 (Angle) X	±2°
设计 (Design): 比例 (Scale):FULL		X.X	±1°
		版次 (Version):T0	