
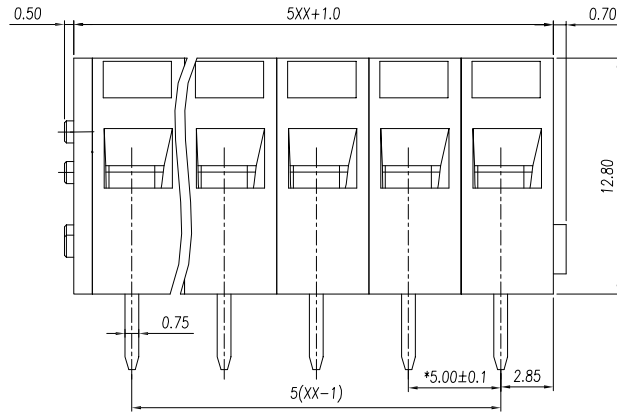
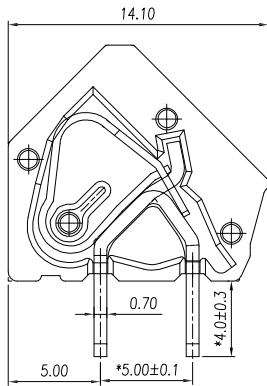


| 版次<br>(Vension) | 变更内容<br>(Rev. Content) | 变更者<br>(Change Person) |
|-----------------|------------------------|------------------------|
|                 |                        |                        |
|                 |                        |                        |



#### 技术参数 (Technical Data)

| UL                          | 应用组别(Use group)                                         | B                                | C        | D        |
|-----------------------------|---------------------------------------------------------|----------------------------------|----------|----------|
|                             | 额定电器参数<br>(Rated Electrical Parameters)                 | 300V/15A                         | 300V/15A | 300V/15A |
| IEC                         | 过压类别 (Overvoltage Category)<br>/污染等级 (Pollution Degree) | III/3                            | III/2    | III/2    |
|                             | 额定电器参数<br>(Rated Electrical Parameters)                 | 300V/15A                         | 300V/15A | 300V/15A |
| 压线范围(Wire Range)            |                                                         | /                                |          |          |
| 工频耐压(Frequency Voltage)     |                                                         | AC 1600V                         |          |          |
| 冲击耐压(Rated Surge Voltage)   |                                                         | 4000V                            |          |          |
| 绝缘阻抗(Insulation Resistance) |                                                         | DC500V 500MΩ above               |          |          |
| 接触电阻(Contact Resistance)    |                                                         | ≤20mΩ                            |          |          |
| 剥线长度(String Length)         |                                                         | /                                |          |          |
| 工作温度(Temperature)           |                                                         | -40° C--+105° C                  |          |          |
| 额定扭矩(Rated torque)          |                                                         | /                                |          |          |
| 材质和电镀(Material and plating) |                                                         |                                  |          |          |
| 绝缘材质(Housing)               |                                                         | PA66                             |          |          |
| 导体材料(Contact)               |                                                         | 铜合金, 镀锡(Copper alloy, Sn plsted) |          |          |
| /                           |                                                         | /                                |          |          |

#### 产品命名编码:

(Product Number Code):

FS2.5-XX-500-04-YY

|                                                                                                                                                                               |                      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| 系列 (Series)                                                                                                                                                                   | 型号 (Model)           |
| 极数 (NO. of poles)                                                                                                                                                             | 塑体颜色 (Housing Color) |
| 端子间距 (Pitch)                                                                                                                                                                  |                      |
| <div>1:绿色 (Green) 7:透明色 (Transparent)<br/>2:蓝色 (Blue) 8:白色 (White)<br/>3:黑色 (Black) 9:黄色 (Yellow)<br/>4:灰色 (Grey) Y:多种颜色 (Mixed color)<br/>5:橙色 (Orange)<br/>6:红色 (Red)</div> |                      |

P=5.00mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

| N | 02P   | 03P   | 04P   | 05P   | 06P   | 07P   | 08P   | 09P   | 10P   |
|---|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| L | 12.20 | 17.20 | 22.20 | 27.20 | 32.20 | 37.20 | 42.20 | 47.20 | 52.20 |
| B | 5.00  | 10.00 | 15.00 | 20.00 | 25.00 | 30.00 | 35.00 | 40.00 | 45.00 |
| N | 11P   | 12P   | 13P   | 14P   | 15P   | 16P   | 17P   | 18P   | 19P   |
| L | 57.20 | 62.20 | 67.20 | 72.20 | 77.20 | 82.20 | 87.20 | 92.20 | 97.20 |
| B | 50.00 | 55.00 | 60.00 | 65.00 | 70.00 | 75.00 | 80.00 | 85.00 | 90.00 |

|                                                                                                                                          |  |                       |       |
|------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------|-------|
|  东莞市澳斯电子有限公司<br>DONGGUAN AOSI ELECTRONICS CO., LTD, |  | 公差范围(Tolerance Range) |       |
| 型号(Type): FS2.5-XX-500-04-YY                                                                                                             |  | 150~                  | ±1.50 |
|                                                                                                                                          |  | 60~150                | ±1.00 |
| 核准(Approval): 图号(Drawing NO.):                                                                                                           |  | 30~60                 | ±0.60 |
|                                                                                                                                          |  | 6~30                  | ±0.40 |
| 核审(Audit): 单位(Units):mm 页码(Page):1/1                                                                                                     |  | 0~6                   | ±0.25 |
|                                                                                                                                          |  | 角度 (Angle) X          | ±2°   |
| 设计(Design) 比例(Scale):FULL                                                                                                                |  | X.X                   | ±1°   |
|                                                                                                                                          |  | 版次 (Version):T0       |       |