


| 版次<br>(Vension) | 变更内容<br>(Rev. Content) | 变更者<br>(Change Person) |
|-----------------|------------------------|------------------------|
|                 |                        |                        |
|                 |                        |                        |

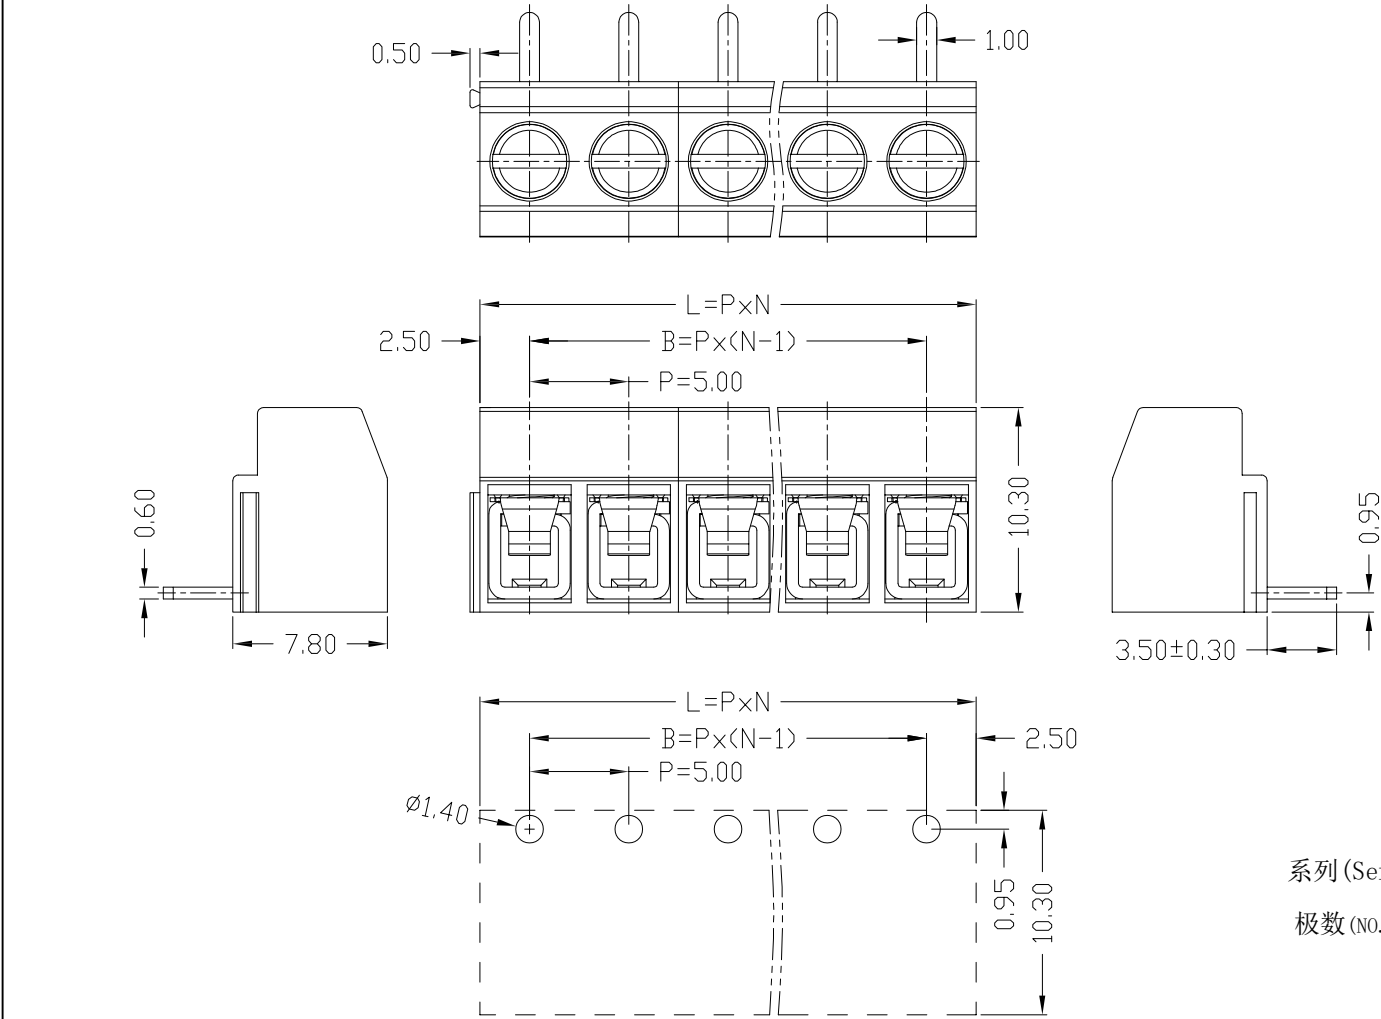

| 技术参数 (Technical Data)       |                                                       |                                  |          |          |
|-----------------------------|-------------------------------------------------------|----------------------------------|----------|----------|
| UL                          | 应用组别(Use group)                                       | B                                | C        | D        |
|                             | 额定电器参数<br>(Rated Electrical Parameters)               | 300V/10A                         | 300V/10A | 300V/10A |
| IEC                         | 过压类别(Overvoltage Category)<br>/污染等级(Pollution Degree) | III/3                            | III/2    | III/2    |
|                             | 额定电器参数<br>(Rated Electrical Parameters)               | 300V/10A                         | 300V/10A | 300V/10A |
| 压线范围(Wire Range)            |                                                       | /                                |          |          |
| 工频耐压(Frequency Voltage)     |                                                       | AC 1600V                         |          |          |
| 冲击耐压(Rated Surge Voltage)   |                                                       | 4000V                            |          |          |
| 绝缘阻抗(Insulation Resistance) |                                                       | DC500V 500MΩ above               |          |          |
| 接触电阻(Contact Resistance)    |                                                       | ≤20mΩ                            |          |          |
| 剥线长度(String Length)         |                                                       | /                                |          |          |
| 工作温度(Temperature)           |                                                       | -40° C--+105° C                  |          |          |
| 额定扭矩(Rated torque)          |                                                       | /                                |          |          |
| 材质和电镀(Material and plating) |                                                       |                                  |          |          |
| 绝缘材质(Housing)               |                                                       | PA66                             |          |          |
| 导体材料(Contact)               |                                                       | 铜合金, 镀锡(Copper alloy, Sn plsted) |          |          |
| /                           |                                                       | /                                |          |          |

产品命名编码:  
(Product Number Code):

FEA2.5-XX-500-06R-YY

系列(Series) 型号(Model) 塑体颜色(Housing Color)  
极数(NO. of poles) 端子间距(Pitch)

- 1:绿色(Green) 7:透明色(Transparent)
- 2:蓝色(Blue) 8:白色(White)
- 3:黑色(Black) 9:黄色(Yellow)
- 4:灰色(Grey) Y:多种颜色(Mixed color)
- 5:橙色(Orange)
- 6:红色(Red)

| P=5.00mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p |       |       |       |       |       |       |       |       |        |
|---------------------------------------------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| N                                                                   | 02P   | 03P   | 04P   | 05P   | 06P   | 07P   | 08P   | 09P   | 10P    |
| L                                                                   | 10.50 | 15.50 | 20.50 | 25.50 | 30.50 | 35.50 | 40.50 | 45.50 | 50.50  |
| B                                                                   | 5.00  | 10.00 | 15.00 | 20.00 | 25.00 | 30.00 | 35.00 | 40.00 | 45.00  |
| N                                                                   | 11P   | 12P   | 13P   | 14P   | 15P   | 16P   | 17P   | 18P   | 19P    |
| L                                                                   | 55.50 | 60.50 | 65.50 | 70.50 | 75.50 | 80.50 | 85.50 | 90.50 | 100.50 |
| B                                                                   | 50.00 | 55.00 | 60.00 | 65.00 | 70.00 | 75.00 | 80.00 | 85.00 | 90.00  |

|                                                                                                                                          |  |                       |               |
|------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------|---------------|
|  东莞市澳斯电子有限公司<br>DONGGUAN AOSI ELECTRONICS CO., LTD. |  | 公差范围(Tolerance Range) |               |
|                                                                                                                                          |  | 150~                  | ±1.50         |
| 型号(Type): FEA2.5-XX-500-06R-YY                                                                                                           |  | 60~150                | ±1.00         |
| 核准(Approval):                                                                                                                            |  | 30~60                 | ±0.60         |
| 图号(Drawing NO.):                                                                                                                         |  | 6~30                  | ±0.40         |
| 核审(Audit):                                                                                                                               |  | 0~6                   | ±0.25         |
| 单位(Units):mm                                                                                                                             |  | 角度(Angle)             | X ±2°         |
| 页码(Page):1/1                                                                                                                             |  | X.X                   | ±1°           |
| 设计(Design)                                                                                                                               |  | 比例(Scale):FULL        | 版次(Versio):T0 |