
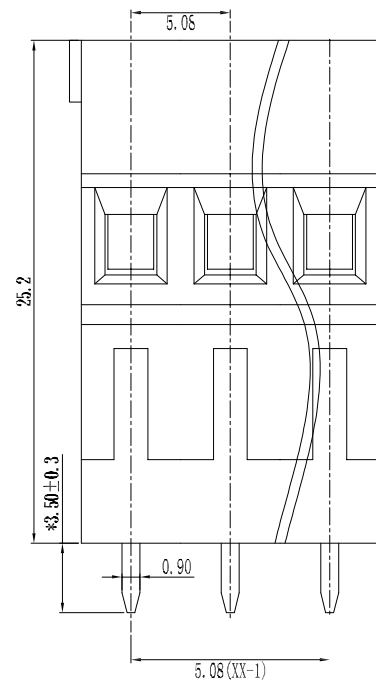
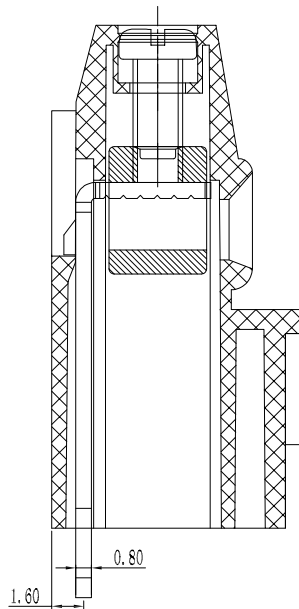


Technical drawing of a mechanical part with dimensions:

- Overall width: $5.08XX$
- Overall height: 12.6
- Top flange thickness: 1.6
- Distance from top edge to center of first hole: 3.14
- Distance between centers of first and second holes: $5.08(X-1)$
- Distance between centers of second and third holes: 5.08
- Angle of the third hole: 0.5°

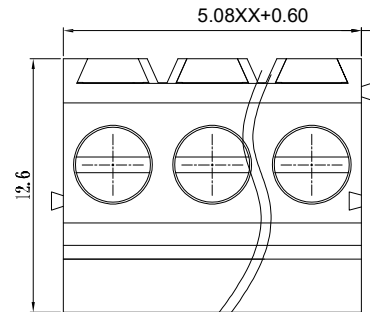

产品命名编码:
(Product Number Code):

FET2.5-XX-508-20-YY

系列 (Series)

— 型号(Model)


极数 (NO. of poles)

塑体颜色(Housing Color)

端子间距(Pitch)

- | | |
|--------------|------------------------|
| 1:绿色(Green) | 7:透明色
(Transparent) |
| 2:蓝色(Blue) | |
| 3:黑色(Black) | 8:白色(White) |
| 4:灰色(Grey) | 9:黄色(Yellow) |
| 5:橙色(Orange) | Y:多种颜色 |
| 6:红色(Red) | (Mixed color) |

P=5.08mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p									
N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	11.36	16.44	21.52	26.60	31.68	36.76	41.84	46.92	52.00
B	5.08	10.16	15.24	20.32	25.40	30.48	35.56	40.64	45.72
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	57.08	62.16	67.24	72.32	77.40	82.48	87.56	92.64	97.72
B	50.80	55.88	60.96	66.04	71.12	76.20	81.28	86.36	91.44

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.			公差范围(Tolerance Range)	
			150~	±1.50
型号(Type): FET2.5-XX-508-20-YY			60~150	±1.00
			30~60	±0.60
核准(Approval): 图号(Drawing NO.):			6~30	±0.40
			0~6	±0.25
核审(Audit): 单位(Units):mm 页码(Page):1/1			角度 (Angle)	X ±2° X.X ±1°
设计(Design) 比例(Scale):FULL			 版次(Version):T0	