
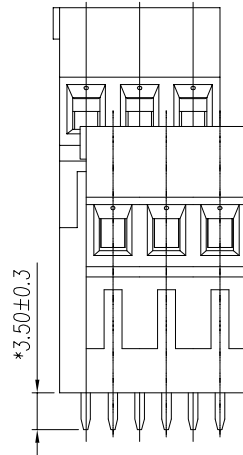
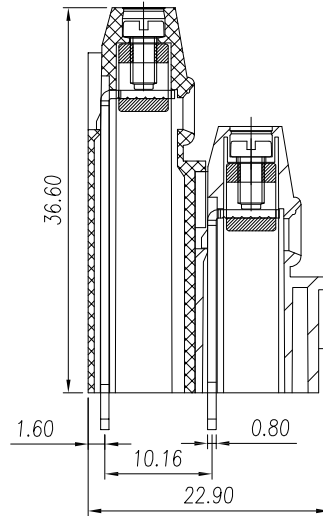
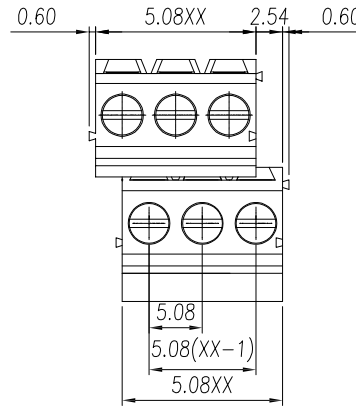


| 版次<br>(Version) | 变更内容<br>(Rev. Content) | 变更者<br>(Change Person) |
|-----------------|------------------------|------------------------|
|                 |                        |                        |
|                 |                        |                        |



| 技术参数 (Technical Data)       |                                                       |                                   |          |          |
|-----------------------------|-------------------------------------------------------|-----------------------------------|----------|----------|
| UL                          | 应用组别(Use group)                                       | B                                 | C        | D        |
|                             | 额定电器参数<br>(Rated Electrical Parameters)               | 300V/15A                          | 300V/15A | 300V/15A |
| IEC                         | 过压类别(Overvoltage Category)<br>/污染等级(Pollution Degree) | III/3                             | III/2    | III/2    |
|                             | 额定电器参数<br>(Rated Electrical Parameters)               | 300V/15A                          | 300V/15A | 300V/15A |
| 压线范围(Wire Range)            |                                                       | /                                 |          |          |
| 工频耐压(Frequency Voltage)     |                                                       | AC 1600V                          |          |          |
| 冲击耐压(Rated Surge Voltage)   |                                                       | 4000V                             |          |          |
| 绝缘阻抗(Insulation Resistance) |                                                       | DC500V 500MΩ above                |          |          |
| 接触电阻(Contact Resistance)    |                                                       | ≤20mΩ                             |          |          |
| 剥线长度(String Length)         |                                                       | /                                 |          |          |
| 工作温度(Temperature)           |                                                       | -40° C--+105° C                   |          |          |
| 额定扭矩(Rated torque)          |                                                       | /                                 |          |          |
| 材质和电镀(Material and plating) |                                                       |                                   |          |          |
| 绝缘材质(Housing)               |                                                       | PA66                              |          |          |
| 导体材料(Contact)               |                                                       | 铜合金, 镀锡(Copper alloy, Sn plisted) |          |          |
| /                           |                                                       | /                                 |          |          |

产品命名编码:  
(Product Number Code):

**FET2.5-XX-508-32A-YY**

系列(Series) ———— 型号(Model)  
极数(NO. of poles) ———— 塑体颜色(Housing Color)

端子间距(Pitch) ————

|              |                         |
|--------------|-------------------------|
| 1:绿色(Green)  | 7:透明色<br>(Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)             |
| 3:黑色(Black)  | 9:黄色(Yellow)            |
| 4:灰色(Grey)   | Y:多种颜色<br>(Mixed color) |
| 5:橙色(Orange) |                         |
| 6:红色(Red)    |                         |

P=5.08mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

| N | 02P   | 03P   | 04P   | 05P   | 06P   | 07P   | 08P   | 09P   | 10P    |
|---|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| L | 13.90 | 18.98 | 24.06 | 29.14 | 34.22 | 39.30 | 44.38 | 49.46 | 54.54  |
| B | 5.08  | 10.16 | 15.24 | 20.32 | 25.40 | 30.48 | 35.56 | 40.64 | 45.72  |
| N | 11P   | 12P   | 13P   | 14P   | 15P   | 16P   | 17P   | 18P   | 19P    |
| L | 59.62 | 64.70 | 69.78 | 74.86 | 79.94 | 85.02 | 90.1  | 95.18 | 100.26 |
| B | 50.8  | 55.88 | 60.96 | 66.04 | 71.12 | 76.2  | 81.28 | 86.36 | 91.44  |

|                                                                                                                                          |  |                       |             |
|------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------|-------------|
|  东莞市奥斯电子有限公司<br>DONGGUAN AOSI ELECTRONICS CO., LTD. |  | 公差范围(Tolerance Range) |             |
|                                                                                                                                          |  | 150~                  | ±1.50       |
| 型号(Type): FET2.5-XX-508-32A-YY                                                                                                           |  | 60~150                | ±1.00       |
| 核准(Approval):                                                                                                                            |  | 图号(Drawing NO.):      | 30~60 ±0.60 |
| 核审(Audit):                                                                                                                               |  | 单位(Units):mm          | 6~30 ±0.40  |
| 设计(Design)                                                                                                                               |  | 页码(Page):1/1          | 0~6 ±0.25   |
| 比例(Scale):FULL                                                                                                                           |  | 角度(Angle): X          | ±2°         |
|                                                                                                                                          |  |                       | X.X ±1°     |
|                                                                                                                                          |  | 版次(Version):T0        |             |