
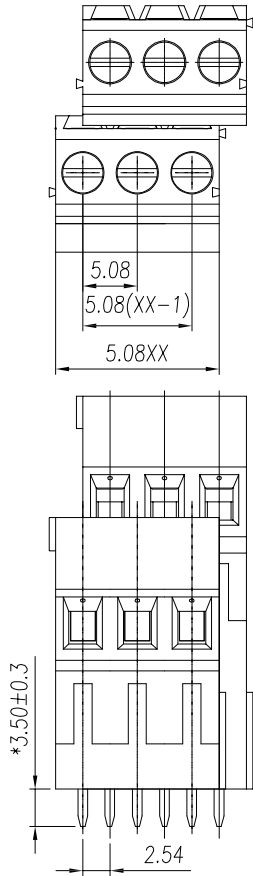
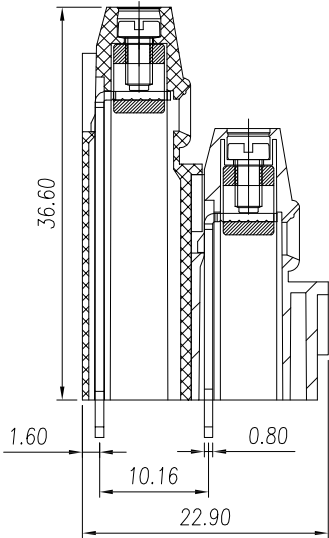


| 版次<br>(Version) | 变更内容<br>(Rev. Content) | 变更者<br>(Change Person) |
|-----------------|------------------------|------------------------|
|                 |                        |                        |
|                 |                        |                        |



| 技术参数 (Technical Data)        |                                                         |                                  |          |          |
|------------------------------|---------------------------------------------------------|----------------------------------|----------|----------|
| UL                           | 应用组别(Use group)                                         | B                                | C        | D        |
|                              | 额定电器参数<br>(Rated Electrical Parameters)                 | 300V/15A                         | 300V/15A | 300V/15A |
| IEC                          | 过压类别 (Overvoltage Category)<br>/污染等级 (Pollution Degree) | III/3                            | III/2    | III/2    |
|                              | 额定电器参数<br>(Rated Electrical Parameters)                 | 300V/15A                         | 300V/15A | 300V/15A |
|                              | 压线范围(Wire Range)                                        | /                                |          |          |
| 工频耐压(Frequency Voltage)      |                                                         | AC 1600V                         |          |          |
| 冲击耐压(Rated Surge Voltage)    |                                                         | 4000V                            |          |          |
| 绝缘阻抗 (Insulation Resistance) |                                                         | DC500V 500MΩ above               |          |          |
| 接触电阻(Contact Resistance)     |                                                         | ≤20mΩ                            |          |          |
| 剥线长度(String Length)          |                                                         | /                                |          |          |
| 工作温度(Temperature)            |                                                         | -40° C---+105° C                 |          |          |
| 额定扭矩(Rated torque)           |                                                         | /                                |          |          |
| 材质和电镀(Material and plating)  |                                                         |                                  |          |          |
| 绝缘材质(Housing)                |                                                         | PA66                             |          |          |
| 导体材料(Contact)                |                                                         | 铜合金, 镀锡(Copper alloy, Sn plsted) |          |          |
| /                            |                                                         | /                                |          |          |

产品命名编码:  
(Product Number Code):

FET2.5-XX-508-32B-YY

系列(Series) 型号(Model)  
极数(NO. of poles) 塑体颜色(Housing Color)  
端子间距(Pitch)

- |              |                         |
|--------------|-------------------------|
| 1:绿色(Green)  | 7:透明色<br>(Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)             |
| 3:黑色(Black)  | 9:黄色(Yellow)            |
| 4:灰色(Grey)   | Y:多种颜色<br>(Mixed color) |
| 5:橙色(Orange) |                         |
| 6:红色(Red)    |                         |

P=5.08mm,N为孔位数(N for hole digits),有效位数为 (Significant Digits):02p-19p

| N | 02P   | 03P   | 04P   | 05P   | 06P   | 07P   | 08P   | 09P   | 10P    |
|---|-------|-------|-------|-------|-------|-------|-------|-------|--------|
| L | 13.90 | 18.98 | 24.06 | 29.14 | 34.22 | 39.30 | 44.38 | 49.46 | 54.54  |
| B | 5.08  | 10.16 | 15.24 | 20.32 | 25.40 | 30.48 | 35.56 | 40.64 | 45.72  |
| N | 11P   | 12P   | 13P   | 14P   | 15P   | 16P   | 17P   | 18P   | 19P    |
| L | 59.62 | 64.70 | 69.78 | 74.86 | 79.94 | 85.02 | 90.1  | 95.18 | 100.26 |
| B | 50.8  | 55.88 | 60.96 | 66.04 | 71.12 | 76.2  | 81.28 | 86.36 | 91.44  |

|                                                                                                                                          |  |                       |                 |
|------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------|-----------------|
|  东莞市奥斯电子有限公司<br>DONGGUAN AOSI ELECTRONICS CO., LTD, |  | 公差范围(Tolerance Range) |                 |
|                                                                                                                                          |  | 150~                  | ±1.50           |
| 型号(Type): FET2.5-XX-508-32B-YY                                                                                                           |  | 60~150                | ±1.00           |
| 核准(Approval):                                                                                                                            |  | 30~60                 | ±0.60           |
| 图号(Drawing NO.):                                                                                                                         |  | 6~30                  | ±0.40           |
| 核审(Audit):                                                                                                                               |  | 0~6                   | ±0.25           |
| 单位(Units):mm                                                                                                                             |  | 角度 (Angle)            | X ±2°           |
| 页码(Page):1/1                                                                                                                             |  | X.X                   | ±1°             |
| 设计(Design)                                                                                                                               |  | 比例(Scale):FULL        | 版次 (Version):T0 |