

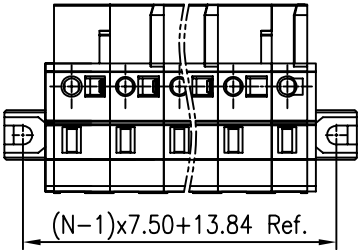



| 版次<br>(Vension) | 变更内容<br>(Rev. Content) | 变更者<br>(Change Person) |
|-----------------|------------------------|------------------------|
|                 |                        |                        |
|                 |                        |                        |

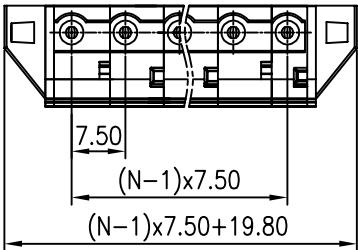

| 技术参数 (Technical Data)       |                                         |                                  |          |          |
|-----------------------------|-----------------------------------------|----------------------------------|----------|----------|
| UL                          | 应用组别(Use group)                         | B                                | C        | D        |
|                             | 额定电器参数<br>(Rated Electrical Parameters) | 300V/15A                         | 300V/15A | 300V/15A |
| IEC                         | 过压类别(Overvoltage Category)              | III/3                            | III/2    | III/2    |
|                             | /污染等级(Pollution Degree)                 |                                  |          |          |
|                             | 额定电器参数<br>(Rated Electrical Parameters) | 300V/15A                         | 300V/15A | 300V/15A |
| 压线范围(Wire Range)            |                                         | /                                |          |          |
| 工频耐压(Frequency Voltage)     |                                         | AC 2500V                         |          |          |
| 冲击耐压(Rated Surge Voltage)   |                                         | 4000V                            |          |          |
| 绝缘阻抗(Insulation Resistance) |                                         | DC500V 500MΩ above               |          |          |
| 接触电阻(Contact Resistance)    |                                         | ≤20mΩ                            |          |          |
| 剥线长度(String Length)         |                                         | /                                |          |          |
| 工作温度(Temperature)           |                                         | -40° C---+105° C                 |          |          |
| 额定扭矩(Rated torque)          |                                         | /                                |          |          |
| 材质和电镀(Material and plating) |                                         |                                  |          |          |
| 绝缘材质(Housing)               |                                         | PA66                             |          |          |
| 导体材料(Contact)               |                                         | 铜合金, 镀锡(Copper alloy, Sn plsted) |          |          |
| /                           |                                         | /                                |          |          |

产品命名编码:  
(Product Number Gode):

FPC2.5-XX-750-22MB-YY

系列(Series) 型号(Model)  
极数(NO. of poles) 塑体颜色(Housing Color)

端子间距 (Pitch)

|              |                         |
|--------------|-------------------------|
| 1:绿色(Green)  | 7:透明色<br>(Transparent)  |
| 2:蓝色(Blue)   | 8:白色(White)             |
| 3:黑色(Black)  | 9:黄色(Yellow)            |
| 4:灰色(Grey)   | Y:多种颜色<br>(Mixed color) |
| 5:橙色(Orange) |                         |
| 6:红色(Red)    |                         |

P=7.50mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p

| N | 02P   | 03P    | 04P    | 05P    | 06P    | 07P    | 08P    | 09P    | 10P    |
|---|-------|--------|--------|--------|--------|--------|--------|--------|--------|
| L | 27.30 | 34.80  | 42.30  | 49.80  | 57.30  | 64.80  | 72.30  | 79.80  | 87.30  |
| B | 7.50  | 15.00  | 22.50  | 30.00  | 37.50  | 45.00  | 52.50  | 60.00  | 67.50  |
| N | 11P   | 12P    | 13P    | 14P    | 15P    | 16P    | 17P    | 18P    | 19P    |
| L | 94.80 | 102.30 | 109.80 | 117.30 | 124.80 | 132.30 | 139.80 | 147.30 | 154.80 |
| B | 75.00 | 82.50  | 90.00  | 97.50  | 105.00 | 112.50 | 120.00 | 127.50 | 135.00 |

|                                                                                                                                          |  |                       |                |
|------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------|----------------|
|  东莞市澳斯电子有限公司<br>DONGGUAN AOSI ELECTRONICS CO., LTD, |  | 公差范围(Tolerance Range) |                |
|                                                                                                                                          |  | 150~                  | ±1.50          |
| 型号(Type): FPC2.5-XX-750-22MB-YY                                                                                                          |  | 60~150                | ±1.00          |
| 核准(Approval):                                                                                                                            |  | 30~60                 | ±0.60          |
| 图号(Drawing NO.):                                                                                                                         |  | 6~30                  | ±0.40          |
| 核审(Audit):                                                                                                                               |  | 0~6                   | ±0.25          |
| 单位(Units):mm                                                                                                                             |  | 角度(X                  | ±2°            |
| 页码(Page):1/1                                                                                                                             |  | (Angle) X.X           | ±1°            |
| 设计(Design)                                                                                                                               |  | 比例(Scale):FULL        | 版次(Version):T0 |