


版次 (Version)	变更内容 (Rev. Content)	变更者 (Change Person)

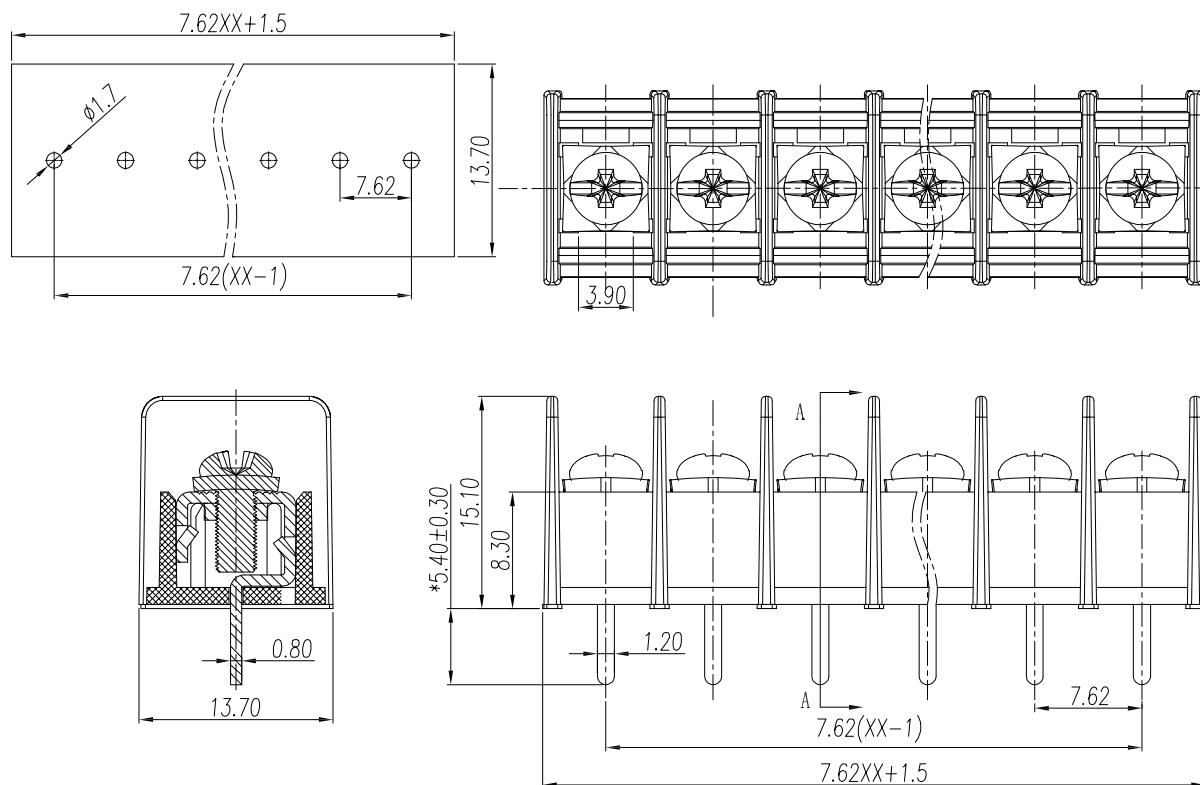

P=7.62mm,N为孔位数(N for hole digits),有效位数为(Significant Digits):02p-19p									
N	02P	03P	04P	05P	06P	07P	08P	09P	10P
L	16.74	24.36	31.98	39.6	47.22	54.84	62.46	70.08	77.70
B	7.62	15.24	22.86	30.48	38.1	45.72	53.34	60.96	68.58
N	11P	12P	13P	14P	15P	16P	17P	18P	19P
L	85.32	92.94	100.56	108.18	115.80	123.42	131.04	138.66	146.28
B	76.2	83.82	91.44	99.06	106.68	114.3	121.92	129.54	137.16

技术参数 (Technical Data)				
UL	应用组别(Use group)	B	C	D
	额定电器参数 (Rated Electrical Parameters)	300V/15A	300V/15A	300V/15A
IEC	过压类别(Overvoltage Category)	III/3	III/2	III/2
	污染等级(Pollution Degree)			
	额定电器参数 (Rated Electrical Parameters)	250V/24A	250V/24A	250V/24A
压线范围(Wire Range)		/		
工频耐压(Frequency Voltage)		AC 2500V		
冲击耐压(Rated Surge Voltage)		4000V		
绝缘阻抗(Insulation Resistance)		DC500V 500MΩ above		
接触电阻(Contact Resistance)		≤20mΩ		
剥线长度(String Length)		10		
工作温度(Temperature)		-40° C--+105° C		
额定扭矩(Rated torque)		/		
材质和电镀(Material and plating)				
绝缘材质(Housing)		PA66		
导体材料(Contact)		铜合金, 镀锡(Copper alloy, Sn plisted)		
/		/		

产品命名编码:
(Product Number Code):

BT2.5-XX-762-25C - YY

系列 (Series)	型号 (Model)
极数 (NO. of poles)	塑体颜色 (Housing Color)

端子间距(Pitch)	1:绿色(Green)	7:透明色
	2:蓝色(Blue)	(Transparent)
	3:黑色(Black)	8:白色(White)
	4:灰色(Grey)	9:黄色(Yellow)
	5:橙色(Orange)	Y:多种颜色
	6:红色(Red)	(Mixed color)

 东莞市澳斯电子有限公司 DONGGUAN AOSI ELECTRONICS CO., LTD.		公差范围(Tolerance Range)	
		150~	±1.50
型号(Type): BT2.5-XX-762-25C-YY		60~150	±1.00
		30~60	±0.60
核准(Approval):		6~30	±0.40
		0~6	±0.25
图号(Drawing NO.):		角度	X
		(Angle)	X.X
核审(Audit):	单位(Units):mm	页码(Page):1/1	±2° ±1°
设计(Design)	比例(Scale):FULL		版次(Version):T0